


Prevent drop-off
accidents on your
loading docks.

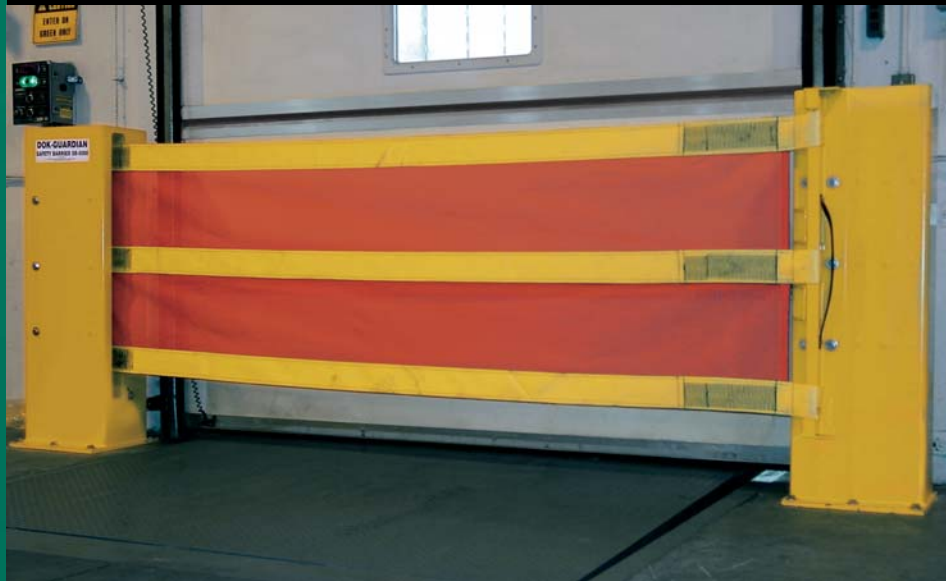


DOK-GUARDIAN Heavy-Duty Safety Barrier.

DOK-GUARDIAN Heavy-Duty Safety Barrier

- › Helps prevent fork trucks, pallet jacks and pedestrians from falling off the loading dock.
- › Manually positioned barrier easily fits across openings up to 16' (4.9 m) wide.
- › Barrier heightens dock drop-off awareness.
- › Warden™ guards provide excellent door track protection.

Specifications:

- › 48" (1.2 m) tall, 1/4" (6.4 mm) steel Warden door guards (roller side and latching side)
- › Warden guards to be painted safety yellow
- › Utilizes (6) 3/4" (19 mm) x 5 1/4" (133.4 mm) anchors each side (included)
- › 5/8" (15.9 mm) x 16" (406 mm) x 16" (406 mm) base plate (roller side)
- › 5/8" (15.9 mm) x 16" (406 mm) x 14" (355 mm) base plate (latching side)
- › Curtain to be red PVC-coated fiberglass mesh with three heavy-duty polyester safety restraint straps
- › Proper setback from the edge of the dock will be determined by the width of the Dok-Guardian
- › 1-year warranty

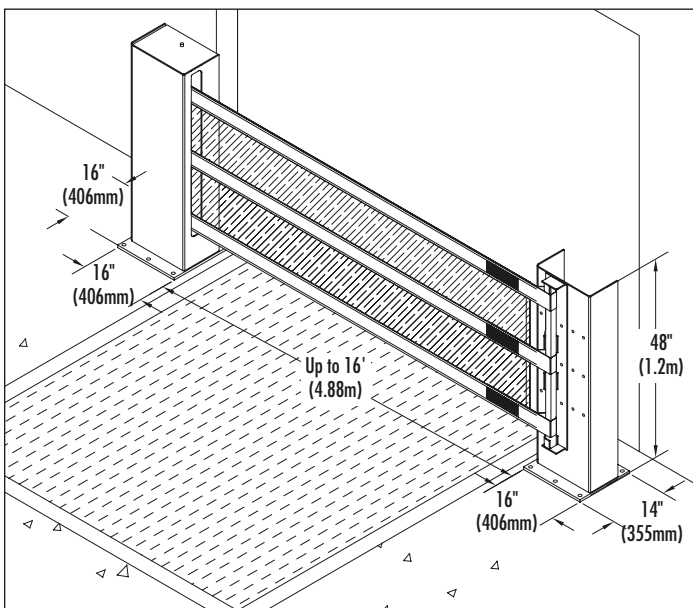

Barrier will stop a 10,000-lb. (4536 kg) fork truck traveling up to 4 miles per hour (6.44 kph) with little or no damage to the safety barrier.



Unique Warden "pocket" design.

Dok-Guardian™ Heavy Duty Safety Barrier Architectural Specifications

Product

2.1 Dok-Guardian barrier is designed to protect a loading dock opening or other area where drop-off protection is needed.

2.2 Dok-Guardian red barrier shall be 44" tall with three 4" high heavy-duty yellow safety restraint straps.

2.3 Dok-Guardian shall be manually extended across openings up to 16'5" wide.

2.4 Dok-Guardian shall withstand the repeated impact of a 10,000 pound fork truck traveling up to 4 mph with little or no damage to the barrier.

2.5 Dok-Guardian Warden™ door guards shall be 48" tall and made from 1/4" steel with 16" x 16" (roller side) and 16" x 14" (latching side) x 5/8" base plates.

2.6 Warden base plates shall be mounted with six (6) 3/4" x 5 1/4" anchor bolts to be supplied by manufacturer.

2.7 Dok-Guardian Wardens shall protect overhead door tracks from impact and be painted safety yellow.

2.8 Dok-Guardian barrier shall fully store inside the Warden door track protector completely out of the door opening.

2.9 Dok-Guardian shall have a latching system on one Warden to secure barrier in the extended position.

2.10 Dok-Guardian shall have a 1-year parts and labor warranty.

Execution

3.1 Installer shall examine the substrate and conditions under which the Dok-Guardian is to be installed and notify the A/E and Contractor in writing of any conditions detrimental to the proper and timely completion of the work. Do not proceed with work until unsatisfactory conditions have been corrected in a manner acceptable to the installer.

3.2 After installation is completed, a representative of the manufacturer shall examine the installation and assure that proper installation of the Dok-Guardian has been made.